

*City of Salem, Virginia*

# Typical Carport Enclosure Details

Based on the 2015 International Residential Code



Carports enclosed into one-story garages or living spaces must be constructed in conformance with the Virginia Residential Code. For requirements, details and information not contained herein, you must consult the Virginia Residential Code. Code books may be viewed [online](http://online) or purchased from the International Code Council at [iccsafe.org](http://iccsafe.org).

## Community Development


Building Inspections

21 South Bruffey Street  
Salem, VA 24153  
(540) 375-3036

Roanoke County, Virginia

# Typical Carport Enclosure Details

## CONTENTS

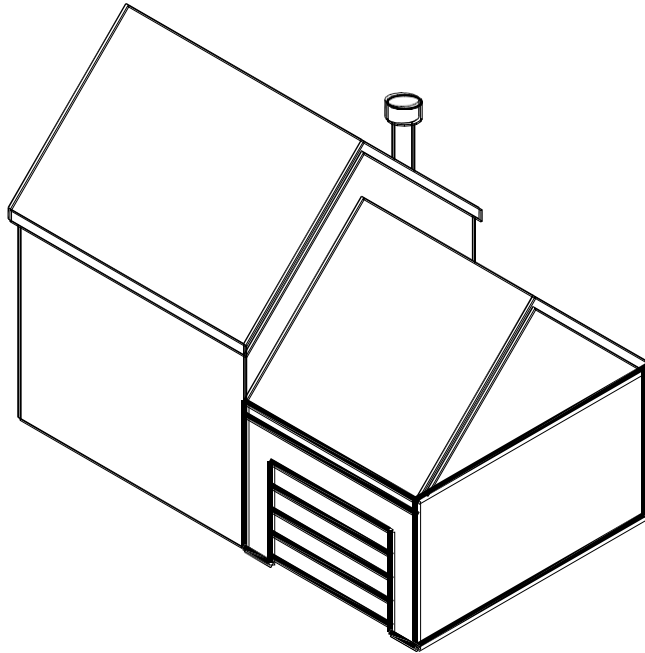

<b>Section 1 ■ General Notes .....</b>	<b>3</b>
<b>Section 2 ■ Emergency Escape and Rescue .....</b>	<b>3</b>
<b>Section 3 ■ Foundation and Floor .....</b>	<b>4</b>
Foundation requirements .....	4
Floors .....	4
<b>Section 4 ■ Wall Construction.....</b>	<b>5</b>
Studs .....	5
Headers .....	5
Finishes and Sheathing .....	6
<b>Section 5 ■ Energy Compliance .....</b>	<b>6</b>
<b>Section 6 ■ Plumbing.....</b>	<b>6</b>
<b>Section 7 ■ Electrical.....</b>	<b>7</b>

A Special Thanks to Fairfax County, Virginia for their preparation of this guideline.



A Fairfax County, Virginia Publication in conjunction with Roanoke County Office of Building Safety

# I - GENERAL NOTES


1. Living spaces shall have an area of not less than 70 square feet and shall not be less than 7 feet in any direction.
2. Ceiling height shall not be less than 7 feet above the finished floor. Structural members spaced 4 feet or more apart may project up to 6 inches below the required ceiling height.
3. A smoke alarm shall be installed in a new bedroom and within the vicinity of the bedroom. New smoke alarms shall be interconnected so that when one is activated all will sound. Smoke alarms must be hardwired with a battery backup.
4. If adding a bedroom and the house is equipped with a gas-fired appliance, a carbon monoxide alarm shall be installed in the vicinity of the bedroom.
5. Doors between an attached garage and adjacent living areas must be a 1 $\frac{3}{8}$ -inch solid wood or steel core door or a 20-minute fire-rated door.

## 2 - EMERGENCY ESCAPE AND RESCUE

**Where required.** An emergency escape and rescue opening in the form of a window or door to the outside is required for a new bedroom.

**Opening requirements.** The emergency escape and rescue opening shall meet the requirements below.

- See FIGURE 1 for typical window opening requirements.
- All doors and windows must be operable from the inside without the need of a key or tool.
- The opening must be a minimum of 5.0 square feet.
- Windows must have a sill 44 inches or less above the finished floor.

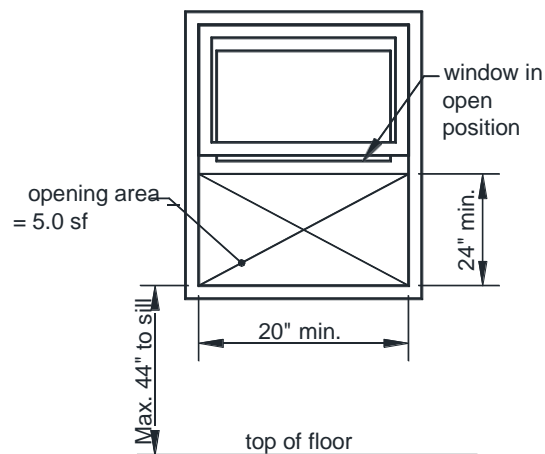

**FIGURE 1: EMERGENCY ESCAPE AND RESCUE OPENING**



R-13 min.  
insulation

\_\_\_\_vapor  
barrier

**FIGURE 5: TYPICAL NEW SLAB-ON-GRADE**

**FIGURE 6: TYPICAL BUILT-UP FLOOR**

# 4 ■ WALL CONSTRUCTION

## STUDS

Studs may be utility grade or better, spaced at 16 inches on center (a 24-inch spacing is permitted for gypsum board finishes) and fastened per TABLE 1. Walls shall have a single pressure treated bottom plate and a double top plate. Studs in non-load bearing walls may be notched or drilled in accordance with FIGURE 7.


**TABLE 1: FASTENING SCHEDULE**

CONNECTION	NAILING METHOD	FASTENER
Top plate to stud	End nail	2-16d (3½" x 0.135")
Stud to bottom plate	Toe nail or	2-16d (3½" x 0.135") <sup>1</sup> or 3-8d (2½" x 0.113") <sup>1</sup>
	End nail	2-16d (3½" x 0.135") <sup>1</sup>
Bottom plate to floor	Face nail	16d concrete nail (3½" x 0.135") @ 16" o.c.
Header to jack stud (see FIGURE 8)	Toe nail	4-8d (2½" x 0.113") each side of header at each end


<sup>1</sup>Fasteners are required to be hot-dipped galvanized.

## HEADERS

Header shall be framed per FIGURE 8 and sized per TABLE 2. Two-ply headers shall be fastened together using 16d (3½" x 0.135") face nails at 16 inches on center staggered along the top and bottom edges.

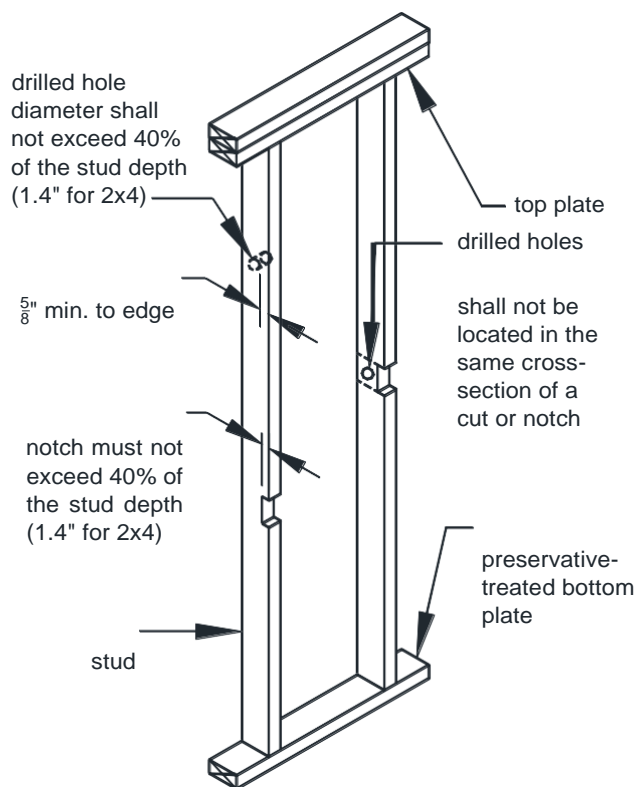

**FIGURE 7: DRILLING AND NOTCHING STUDS**

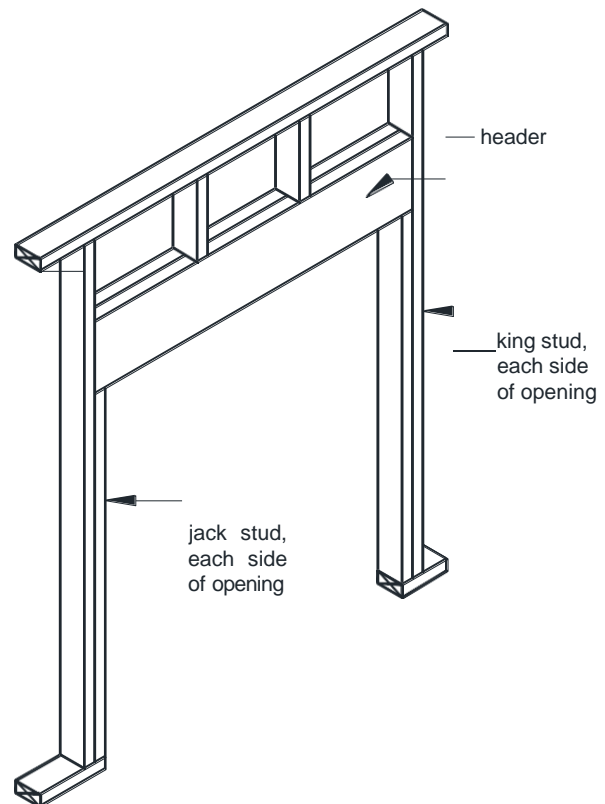

**FIGURE 8: FRAMING AT HEADERS**



**TABLE 2: HEADER SIZE<sup>1</sup>**

HEADER SIZE	SPAN LENGTH
(2)2x4	4'
(2)2x6	6'
(2)2x8	10'
(2)2x10	12'
(2)2x12	16'

<sup>1</sup>Non-load bearing walls only.

## FINISHES AND SHEATHING

**Interior finishes.** Wall and ceiling finish materials must meet the requirements listed below.

- Materials must have a flame spread classification no greater than 200 and a smoke density classification no greater than 450. This does not apply to trim, molding, handrails and doors.
- Wood veneer or hardboard paneling less than ¼-inch shall not be permitted.
- Gypsum board shall be ½-inch minimum.
- In garages, gypsum board must be applied to the walls adjacent living areas.

**Exterior sheathing.** Exterior walls must be sheathed with 7/16-inch plywood or OSB. Each corner must have 4 feet of solid sheathed panels with no openings for windows or doors. This panel may be offset from the corner a maximum of 10 feet if a door or window is desired near the corners. If enclosing a carport into a garage, each side of a garage door must have a minimum 2-foot solid sheathed panel.


## 5 • ENERGY COMPLIANCE

Carports converted to living spaces must have the insulation R-values and fenestration U-factors shown in TABLE 3.

**TABLE 3: R-VALUES AND U-FACTOR REQUIREMENTS**

LOCATION	R-VALUE	U-FACTOR
Window/door	-	0.35
Skylight	-	0.60
Ceiling	38	-
Wall	13	-
Built-up floor	13	-
Slab-on-grade <sup>1</sup>	10	-

<sup>1</sup> Insulation must be provided to protect the slab-on-grade from heat loss; see FIGURE 9.

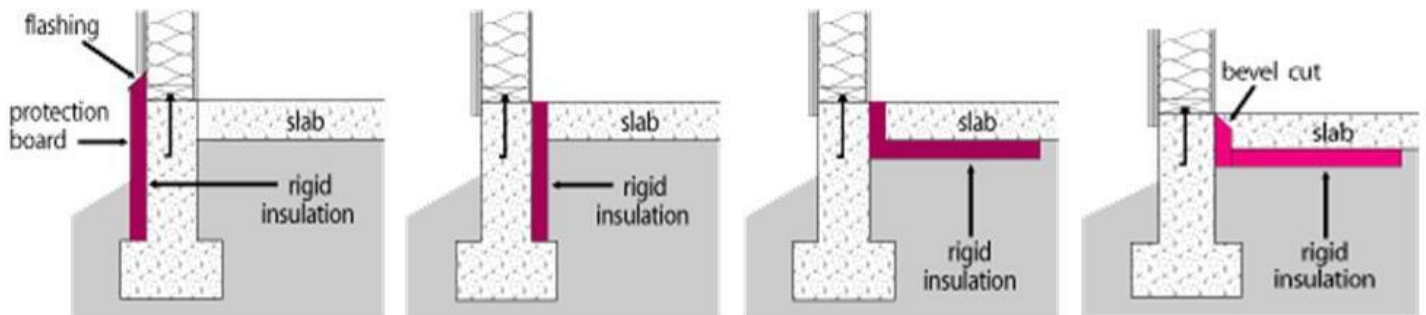**FIGURE 9: SLAB-ON-GRADE INSULATION REQUIREMENTS**

(Insulation must extend from the slab edge to a total length of 24 inches vertically and/or horizontally.)

## 6 ■ PLUMBING

**Showers.** Showers and shower compartments must meet the following requirements.

- Shower compartments must have a minimum total area of 900 square inches and a minimum dimension of 30 inches in any direction.
- Shower compartments may have a minimum dimension of 25 inches provided it maintains a cross section area of 1,300 square inches.
- Hinged shower doors must open outward.
- All glass which encloses as shower must be safety glazed.
- Shower control valves must be scald resistant (in accordance with ASSE/ANSI 1016) with a hot water limit of 120 degree F.

**Fixture Clearances:** Toilets, sinks and showers shall have the minimum clearances listed below.

- 21 inches in front of sinks and toilets.
- 24 inches in front of shower stall opening.
- 4 inches between two adjacent sinks.
- 4 inches between a sink and a toilet.
- 4 inches between a sink and a wall.
- 2 inches between a sink and a bathtub.
- 15 inches clearance from a toilet's centerline to an adjacent fixture or wall on each side.

**Drain Size:** Fixture drain size must meet the dimensions below and must be equipped with a strainer and stopper.

**TABLE 4: MINIMUM DRAIN SIZE**

<b>FIXTURE</b>	<b>DIAMETER, INCHES</b>
Bathroom sink	1 <sup>1</sup> / <sub>4</sub>
Bathtubs	1 <sup>1</sup> / <sub>2</sub>
Sinks (other than bathroom)	1 <sup>1</sup> / <sub>2</sub>
Laundry tubs	1 <sup>1</sup> / <sub>2</sub>
Shower	1 <sup>1</sup> / <sub>2</sub>

## 7 ■ ELECTRICAL

**Branch circuits.** Branch circuits must meet the requirements listed below. See TABLE 5 for more information.

- Use a 15- to 20-ampere rated branch circuit for general use purposes such as lighting and outlets.
- One “plugged-in” electrical device shall not exceed 80 percent of the circuit rating.
- Hardwired appliances or equipment may be included in a general use circuit provided its rating does not exceed 50 percent of the circuit rating.
- Branch circuits which serve bedroom outlets must have circuit breakers equipped as combination arc-fault/over current circuit interrupters.



**TABLE 5: BRANCH CIRCUIT REQUIREMENTS**

CIRCUIT ELEMENT	CIRCUIT RATING		
	15 amp	20 amp	30 amp
Minimum conductor size	14	12	10
Maximum breaker size	15	20	30
Outlets rating	15	15 or 20	30
Maximum load	15	20	30

**Lighting requirements.** Lights must meet the requirements listed below.

- At least one switched light or outlet shall be provided in each room. A switched outlet cannot count towards a required outlet.
- At least one switched or pull chain light must be provided in each closet. Fixtures installed in clothes closets shall be limited to surface mounted or recessed incandescent fixtures with completely enclosed lamps and surface mounted or recessed fluorescent fixtures. See TABLE 6 for clearance requirements.

**TABLE 6: CLOSET LIGHT FIXTURE CLEARANCES<sup>1</sup>**


FIXTURE TYPE	FLUORESCENT BULB <sup>2</sup>	LED BULB <sup>2</sup>
Surface mounted	6"	12"
Recessed	6"	6"

<sup>1</sup> Incandescent bulbs are prohibited.

<sup>2</sup> Fluorescent and LED bulbs are permitted in storage areas when identified for this use.

**Outlets.** Outlets must meet the requirements listed below.

- Outlets shall be tamper resistant.
- Outlets shall be placed in accordance with FIGURE 10.
- The minimum wall length which requires an outlet is 2 feet.
- Knee walls, built-in bars and other fixed room dividers must be included for outlet spacing.
- Outlets installed for specific appliances must be within 6 feet of the appliance location.

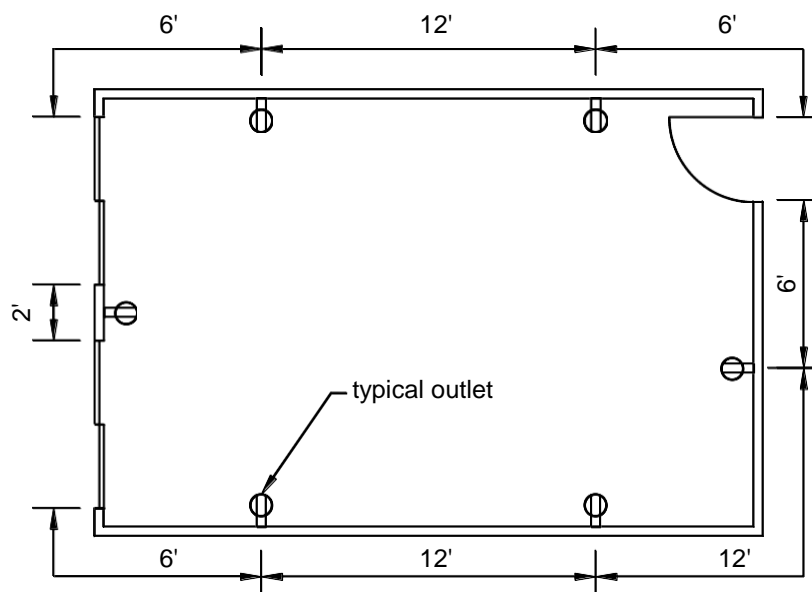**FIGURE 10: TYPICAL OUTLET DISTRIBUTION**